

INTELLI-SENSE

Addressable Device

TI-002231

DESCRIPTION

The TI-002231 standard intelligent low profile mounting base has been designed for use with any of the Intelli-Sense point type intelligent detector range. The base's layout allows plenty of space for cable access and has multiple mounting-hole positions for use with a variety of back boxes. The unit has terminations for loop wiring, remote indicator connection and termination of shield cabling. When no device is fitted into the base, an automatic spring connection maintains loop continuity ready for loop cable testing. Once the device is refitted the spring is displaced allowing the loop isolators to operate.

KEY FEATURES


- High reliability
- Compatible with all Intelli-Sense detectors
- Device locking capability
- Easy central cable entry
- Integral device identification tab
- Remote indicator connections
- Built-in continuity spring
- 1 year product warranty

TECHNICAL SPECIFICATION

Physical Dimensions	190 x 119 mm x 80 mm
Temperature Range (no icing)	-10°C to +55°C
Max. humidity (non condensing)	95% RH
Weight (standard base included)	426g

*Device operates down to 15Vdc but without LED indication

TECHNICAL INFORMATION

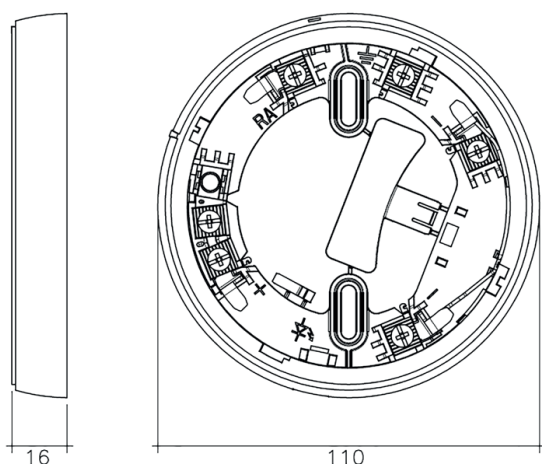

Call: 1800 120 3473 / +91 9540 666 666
/ +91 120 4223473

Visit our website: ceasefire.in

Email: response@ceasefire.in

Ceasefire Industries Pvt. Ltd.

Plot No. 4, Second Floor, Sector-135,
Noida - Greater Noida Expressway,
Noida - 201 301, Uttar Pradesh (India)