

CEASEFIRE CARTRIDGE FIRE EXTINGUISHERS



FIREPOWER, ON THE SPOT.





FIREFIGHTING COMES FULL CIRCLE.

As mankind continues its march of progress, one threat remains a constant: Fire. Whether it is in state-of-the-art factories, in swank corporate offices or super-speciality hospitals, fire is everywhere. And every day, mankind looks for newer, safer ways to stay protected from its oldest enemy. This search has led us back to a firefighting technology that was once labelled as complicated and drawn-out. Cartridge extinguishers.

However, conventional cartridge extinguishers require clear directions to be followed before they can be used to fight the flames. This involves breaking the

seal, turning the extinguisher upside down, banging it against a hard surface, and then turning it upside down again before it is ready to fight the flames. Not only does this mean you waste precious firefighting time, but it also involves wastage of the limited extinguishing agent before the extinguisher is ready to fight the flames.

STANDARDS

**IS15683 EN3-7 & 8 PED
EN1866**

CERTIFICATIONS



BS 15683
CML-4886112



1128

CERTIFYING BODY



bre bsi.



THE CEASEFIRE CARTRIDGE

RELIABLE BACKUP WHEN YOU NEED IT.



Presenting Ceasefire Cartridge. A range of advanced, portable spot-pressure fire extinguishers that kick into action when you need them, where you need them. Helping kill the fire before it destroys everything in its path.

Unlike the complex activation of old, the revolutionary Ceasefire Cartridge is instantly ready. What's more, the cartridge is never under pressure. The required pressure is created on the spot at the time of firefighting, making it one of the safest, surest, most reliable products to have on your side.

The Ceasefire Cartridge requires no prior training when it comes to fighting fires, working quickly and without wasting any of the extinguishing agent to fight the flames. Unlike conventional cartridge extinguishers, the Ceasefire Cartridge can be refilled immediately, anywhere. Eliminating the downtime needed to take them to and fro from the factory for refilling. No wonder then, it is technology that's already being widely used across the world.


THE CARTRIDGE. NEW AND IMPROVED.



Today, cartridge extinguishers have evolved into advanced firefighting machines. Unlike their predecessors, these extinguishers can be instantly activated in case of a fire. Because they are safe and can be easily refilled, these extinguishers are being preferred over stored pressure extinguishers in several European countries.

HOW THE CEASEFIRE CARTRIDGE WORKS

These unique extinguishers have a container filled with the extinguishing agent - either ABC powder, foam or water; and a cartridge filled with a propellant gas – either nitrogen or CO₂. In the event of a fire, all you need to do is remove the safety seal and press the trigger firmly to activate the fire extinguisher. This punctures the cartridge and releases the gas into the container holding the extinguishing agent, creating the pressure required to throw the extinguishing agent over the fire.

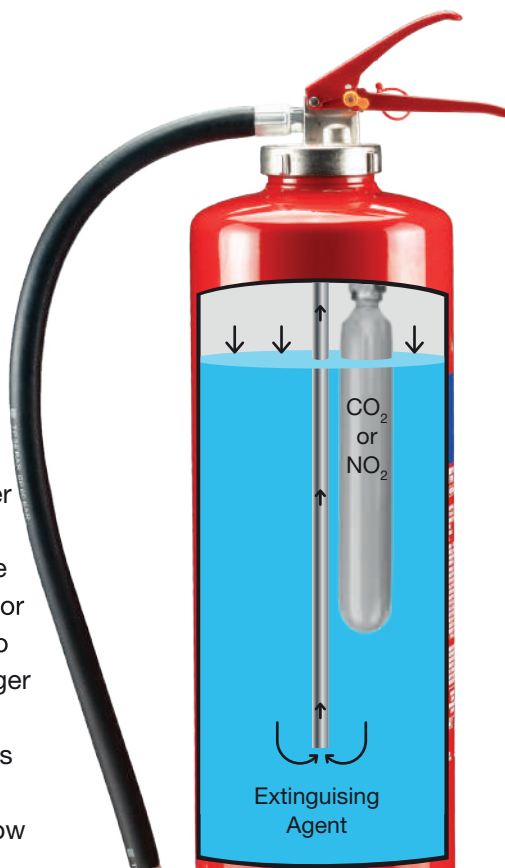

Remove the safety seal.



Press the trigger firmly to activate the fire extinguisher.



Spray the extinguishing agent over the fire.

FEATURES AND BENEFITS OF THE CEASEFIRE CARTRIDGE



Safe, Reliable Extinguisher:

Unlike conventional cartridge extinguishers, the Ceasefire Cartridge isn't constantly under pressure. The required pressure is created on the spot at the time of firefighting, making it one of the safest, most reliable extinguishers around.



Easy-to-use with Quick Activation:

Being a spot pressure extinguisher, the Cartridge can be instantly activated by firmly pressing the trigger.



Extinguishing Agent:

The Cartridge contains ABC powder, foam or water as the extinguishing agent, enabling them to take on practically any kind of fire.



Safe Technology:

Since these extinguishers create pressure only when required, they ensure absolute safety at all times.



Easy Refilling:

Unlike conventional extinguishers, these extinguishers can be refilled immediately anywhere, thus eliminating the downtime needed to take them to and fro from the factory.



Tamper-proof Safety Seal:

This seal ensures that the extinguisher has not been tampered with, and is ready for use in the event of a fire.



Stainless Steel Body:

The extinguisher's stainless steel body ensures that there is no chance of corrosion.



6-Year Warranty

The Ceasefire Cartridge come with a 6-year Warranty.

*It is mandatory for the extinguisher to be refilled by Ceasefire in the 3rd year.

WHAT'S NEW

LATEST UPGRADES THAT MAKE CEASEFIRE EXTINGUISHERS UNMATCHED IN THE INDUSTRY.

1 SCREEN-PRINTED CYLINDER LABEL

Moving beyond conventional applied labels, our extinguishers now feature screen-printed product information directly on the cylinder. The print offers excellent resistance to peeling, tampering, rubbing, scratching and common chemicals, along with high resistance to fading.

This ensures critical information remains clear, long-lasting and legible despite regular wear and tear, keeping essential safety and usage information readily accessible during emergency.



2 GLOW-IN-THE-DARK LOCATOR

Where conventional identification is depended on available ambient light, our extinguishers now feature a phosphorescent glow-in-the-dark cylinder locator to make the extinguisher easier to identify in dark and low-visibility conditions.

Manufactured without phosphor, lead-containing compounds or radioactive materials, the signage conforms to the DIN standard and exceeds the requirements of DIN 67510 Part 4. Under suitable light-charging conditions, it can continue to glow for several hours after lights-out.



This helps users locate the extinguisher faster in darkness, low visibility, and smoke, enabling quicker access and a more immediate response during emergencies

3 ECO-FRIENDLY PACKAGING

Moving away from conventional packaging materials, our extinguishers are now packed using recyclable paper, corrugated board and natural rubber.

This helps users locate the extinguisher faster in darkness, low visibility, and smoke, enabling quicker access and a more immediate response during emergencies.






ABC POWDER CARTRIDGE

Ceasefire's ABC Powder Cartridge takes the guesswork and confusion out of firefighting. Being one of the most versatile extinguishing agents known to man, ABC Powder fights Class A, B, C and electrical fires with ease. When ABC Powder falls on a fire, the Mono Ammonium Phosphate in it expands and forms a thin layer on top of the surface. This controls the fire and stops re-ignition. Being a spot pressure technology it is activated only when needed making it among the safest extinguishers.

Ceasefire ABC powder cartridge is available portable as well as in large sizes (wheeled base).

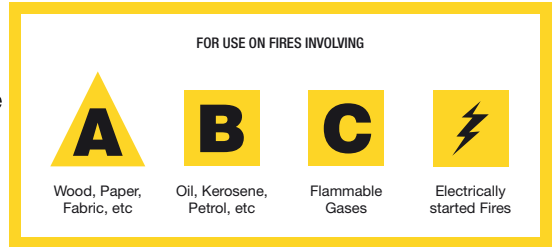


Portable Range:



TECHNICAL SPECIFICATIONS:

NOMENCLATURE FOR PORTABLE FIRE EXTINGUISHER	MAP-50 FIRE-EXTINGUISHER CARTRIDGE TYPE - 4KG	MAP-50 FIRE-EXTINGUISHER CARTRIDGE TYPE - 6KG	MAP-50 FIRE-EXTINGUISHER CARTRIDGE TYPE - 9KG	MAP-50 FIRE-EXTINGUISHER CARTRIDGE TYPE - 12KG
PRODUCT CODE	CF-001151	CF-001152	CF-001153	CF-000995
PRESSURE TYPE	CARTRIDGE TYPE	CARTRIDGE TYPE	CARTRIDGE TYPE	CARTRIDGE TYPE
EXTINGUISHING AGENT	ABC POWDER MAP 50	ABC POWDER MAP 50	ABC POWDER MAP 50	ABC POWDER MAP 50
APPLICABLE ON FIRES	A, B, C, & ELECTRICAL STARTED FIRE	A, B, C, & ELECTRICAL STARTED FIRE	A, B, C, & ELECTRICAL STARTED FIRE	A, B, C, & ELECTRICAL STARTED FIRE
IS 15683 RATINGS	4A	6A	6A	NA
	144B	183B	233B	NA
	NA	NA	NA	NA
EN 3 RATINGS	21A	27A	43A	55A
	144B	183B	233B	233B
	NA	NA	NA	NA
CERTIFICATION STANDARD	EN-3, PED,	EN-3, PED,	EN-3, PED,	EN-3, PED
	IS 15683	IS 15683	IS 15683	
CERTIFICATION BODY	LPCB, BIS & EUROCERT	LPCB, BIS & EUROCERT	LPCB, BIS & EUROCERT	LPCB & EUROCERT
GROSS WEIGHT	8.32 TO 8.48 KG	11.08 TO 11.32 KG	16.72 TO 17.08 KG	APPROX. 19.90 KG
NET CONTENTS	3.92 TO 4.08 KG	5.88 TO 6.12 KG	8.82 TO 9.18 KG	11.76 TO 12.24 KG
APPROX. HEIGHT OF FIRE EXT.	465 MM	510 MM	635 MM	690 MM
DISCHARGE MECHANISM	SQUEEZE GRIP	SQUEEZE GRIP	SQUEEZE GRIP	SQUEEZE GRIP
CAN CONSTRUCTION	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED
VALVE / CAP CONSTRUCTION	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING
INTERNAL COATING	EPOXY POWDER COATING	EPOXY POWDER COATING	EPOXY POWDER COATING	EPOXY POWDER COATING
EXTERNAL COATING	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER
HELIUM LEAK DETECTION TESTING	NO	NO	NO	NO
WARRANTY IN YEARS	10	10	10	10
APPROX. GUN WEIGHT IN KG	N/A	N/A	N/A	N/A
WORKING PRESSURE	13BAR	13BAR	15BAR	13BAR
DIA. OF SHELL (OD)	140.0 MM	160.0 MM	175.0 MM	175.0 MM
OPERATING TEMPERATURE	-30°C TO +55°C	-30°C TO +55°C	-30°C TO +55°C	-30°C TO +55°C
HYDROSTATIC TEST PRESSURE	35BAR	35BAR	35BAR	35BAR
CYLINDER MATERIAL SPEC.	STEEL CR2(DC01)	STEEL CR2(DC01)	STEEL CR2(DC01)	STEEL CR2(DC01)
BODY THICKNESS	1.6 MM	1.6 MM	2.0 MM	1.8 MM
EXTINGUISHER LABEL	SCREEN PRINTED	SCREEN PRINTED	SCREEN PRINTED	SCREEN PRINTED
GLOW IN THE DARK FIRE EXTINGUISHER LOCATOR	YES	YES	YES	YES
GREEN PACKAGING (ENVIRONMENT FRIENDLY)	YES	YES	YES	YES
MOUNTING BRACKET	J HANGER	J HANGER	J HANGER	J HANGER

ABC POWDER WHEELED EXTINGUISHER-BASED CARTRIDGE

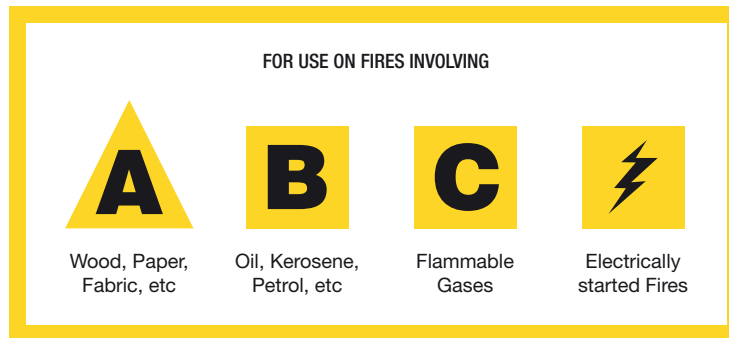

Wheeled Base Range:



25 Kg


50 Kg

75 Kg

FOAM CARTRIDGE

These cartridge type extinguishers use foam to take on Class A and B fires. The Ceasefire Foam Cartridge is also equipped with a specialised nozzle or aerator which produces a thick foam that coats the surface of the fire and cuts off the oxygen supply. This makes them the perfect choice for chemical industries that use flammable liquids. Ceasefire's cartridge technology is far superior than others. It is one of the safest technology and is easy to use.

Available in is available portable as well as in large sizes (wheeled base).

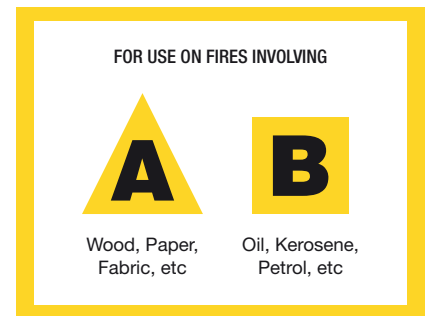

Portable Range:




6 Ltr

9 Ltr

TECHNICAL SPECIFICATIONS:

NOMENCLATURE FOR PORTABLE FIRE EXTINGUISHER	FIRE EXT FOAM 6L MS CT RED	FIRE EXT FOAM 9L MS CT RED
PRODUCT CODE	CF-001157	CF-001158
PRESSURE TYPE	CARTRIDGE TYPE	CARTRIDGE TYPE
EXTINGUISHING AGENT	6% OF KV FOAM 3% C-6	6% OF KV FOAM 3% C-6
APPLICABLE ON FIRES	A & B.	A & B.
IS 15683 RATINGS	3A	4A
	144B	233B
EN 3 RATINGS	13A	21A
	144B	233B
CERTIFICATION STANDARD	EN-3, PED,	EN-3, PED,
	IS 15683	IS 15683
CERTIFICATION BODY	LPCB, BIS & EUROCERT	LPCB, BIS & EUROCERT
GROSS WEIGHT	11.60 TO 11.93 KG	15.95 TO 16.85 KG
NET CONTENTS	5.70 TO 6.00 LTR	8.55 TO 9.00 LTR
APPROX. HEIGHT OF FIRE EXT.	550 MM	635 MM
DISCHARGE MECHANISM	SQUEEZ GRIP	SQUEEZ GRIP
CAN CONSTRUCTION	DEEP DRAWN & MIG WELDED	DEEP DRAWN & MIG WELDED
VALVE / CAP CONSTRUCTION	FORGING AND MACHINING	FORGING AND MACHINING
INTERNAL COATING	EPOXY POWDER COATING	EPOXY POWDER COATING
EXTERNAL COATING	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER
HELIUM LEAK DETECTION TESTING	NO	NO
WARRANTY IN YEARS	6	6
APPROX. GUN WEIGHT IN KG	N/A	N/A
WORKING PRESSURE	10BAR	10BAR
DIA. OF SHELL (OD)	160.0 MM	175.0 MM
OPERATING TEMPERATURE	5°C TO 55°C	5°C TO 55°C
HYDROSTATIC TEST PRESSURE	35BAR	35BAR
CYLINDER MATERIAL SPEC.	STEELCR2(DC01)	STEEL CR2(DC01)
BODY THICKNESS	1.6 MM	2.0 MM
EXTINGUISHER LABEL	SCREEN PRINTED	SCREEN PRINTED
GLOW IN THE DARK FIRE EXTINGUISHER LOCATOR	YES	YES
GREEN PACKAGING (ENVIRONMENT FRIENDLY)	YES	YES
MOUNTING BRACKET	J HANGER	J HANGER

FOAM WHEELED EXTINGUISHER -BASED CARTRIDGE

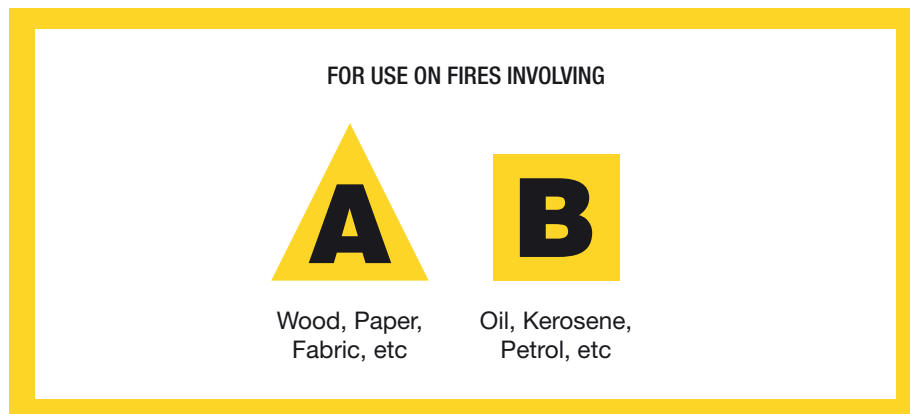

Wheeled extinguisher



60 Ltr

TECHNICAL SPECIFICATIONS:

NOMENCLATURE FOR WHEELED FIRE EXTINGUISHER	FIRE EXT FOAM 60L MS CT RED
PRODUCT CODE	CF-001186
PRESSURE TYPE	CARTRIDGE TYPE
EXTINGUISHING AGENT	6% OF KV FOAM 3% C-6
APPLICABLE ON FIRES	CLASS A & B FIRE
IS 16018 RATINGS	20A
	233B
	NA
EN 1866 RATINGS	
EN 1866 RATINGS	
EN 1866 RATINGS	
CERTIFICATION STANDARD	PED, IS 16018
CERTIFICATION BODY	BIS & EUROCERT
CARTRIDGE SIZE	300 GM
GROSS WEIGHT	109.00 TO 115.00 KG
NET CONTENTS	57.00 TO 63.00 LTR
APPROX. HEIGHT OF FIRE EXT.	1420 MM
DISCHARGE MECHANISM	OPERATING LEVER (BALL VALVE)
CAN CONSTRUCTION	DRAWN ROLLED AND MIG WELDED
VALVE / CAP CONSTRUCTION	FORGING AND MACHINING
INTERNAL COATING	EPOXY POWDER COATING
EXTERNAL COATING	EPOXY POLYESTER POWDER COATING
HELIUM LEAK DETECTION TESTING	NO
WARRANTY IN YEARS	6
APPROX. GUN WEIGHT IN KG	N/A
WORKING PRESSURE	13BAR
DIA. OF SHELL (OD)	300.0 mm
OPERATING TEMPERATURE	+5°C to +60°C
HYDROSTATIC TEST PRESSURE	37.5Bar
CYLINDER MATERIAL SPEC.	Steel CR2(DC01)
BODY THICKNESS	3.0 mm
EXTINGUISHER LABEL	SCREEN PRINTED

WATER-BASED CARTRIDGE

These cartridge type extinguishers employ the most efficient firefighting solution known to man, water. With its massive cooling power of 2.6 MW per litre per second, water kills even the largest of fires in minutes.

In the Ceasefire Water-based Cartridge, water is mixed with CO₂ from the cartridge. When it comes in contact with a fire, the water turns into steam, cooling the area, cutting off the oxygen supply and killing the flames. These extinguishers are ideal for Class A fires.

FOR USE ON FIRES INVOLVING



Wood, Paper,
Fabric, etc

Portable Range



6 Ltr



9 Ltr

TECHNICAL SPECIFICATIONS:

NOMENCLATURE FOR PORTABLE FIRE EXTINGUISHER	FIRE EXT WATER 6L MS CT RED	FIRE EXT WATER 9L MS CT RED
PRODUCT CODE	CF-001155	CF-001156
PRESSURE TYPE	CARTRIDGE TYPE	CARTRIDGE TYPE
EXTINGUISHING AGENT	WATER	WATER
APPLICABLE ON FIRES	A	A
IS 15683 RATINGS	3A	4A
	NA	NA
	NA	NA
EN 3 RATINGS	13A	21A
	NA	NA
	NA	NA
CERTIFICATION STANDARD	EN-3, PED, IS 15683	EN-3, PED, IS 15683
CERTIFICATION BODY	LPCB, BIS & EUROCERT	LPCB, BIS & EUROCERT
GROSS WEIGHT	10.55 TO 11.15 KG	15.35 TO 16.05
NET CONTENTS	5.70 TO 6.00 LTR	8.55 TO 9.00 LTR
APPROX. HEIGHT OF FIRE EXT.	550 MM	635 MM
DISCHARGE MECHANISM	SQUEEZ GRIP	SQUEEZ GRIP
CAN CONSTRUCTION	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED
VALVE / CAP CONSTRUCTION	FORGING AND MACHINING	FORGING AND MACHINING
INTERNAL COATING	EPOXY POWDER COATING	EPOXY POWDER COATING
EXTERNAL COATING	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER
HELIUM LEAK DETECTION TESTING	NO	NO
WARRANTY IN YEARS	6	6
APPROX. GUN WEIGHT IN KG	N/A	N/A
WORKING PRESSURE	10	15BAR
DIA. OF SHELL (OD)	160	175
OPERATING TEMPERATURE	5° C TO 55° C	5° C TO 55° C
HYDROSTATIC TEST PRESSURE	35BAR	35BAR
CYLINDER MATERIAL SPEC.	STEEL CR2(DC01)	STEEL CR2(DC01)
BODY THICKNESS	1.6 MM	2.00MM
EXTINGUISHER LABEL	SCREEN PRINTED	SCREEN PRINTED
GLOW IN THE DARK FIRE EXTINGUISHER LOCATOR	YES	YES
GREEN PACKAGING (ENVIRONMENT FRIENDLY)	YES	YES
MOUNTING BRACKET	J HANGER	J HANGER

WATER WHEELED EXTINGUISHER -BASED CARTRIDGE

FOR USE ON FIRES INVOLVING



Wood, Paper,
Fabric, etc

Wheeled Extinguisher



60 Ltr


TECHNICAL SPECIFICATIONS:

NOMENCLATURE FOR WHEELED FIRE EXTINGUISHER	FIRE EXT WATER 60L MS CT RED
PRODUCT CODE	CF-001187
PRESSURE TYPE	CARTRIDGE TYPE
EXTINGUISHING AGENT	WATER
APPLICABLE ON FIRES	CLASS A FIRE
IS 16018 RATINGS	20A
	NA
	NA
EN 1866 RATINGS	NA
EN 1866 RATINGS	NA
EN 1866 RATINGS	NA
CERTIFICATION STANDARD	PED, IS 16018
CERTIFICATION BODY	BIS & EUROCERT
CARTRIDGE SIZE	250 GM
GROSS WEIGHT	108.00 TO 114.00 KG
NET CONTENTS	57.00 TO 63.00 LTR
APPROX. HEIGHT OF FIRE EXT.	1420 MM
DISCHARGE MECHANISM	OPERATING LEVER (BALL VALVE)
CAN CONSTRUCTION	DRAWN ROLLED AND MIG WELDED
VALVE / CAP CONSTRUCTION	FORGING AND MACHINING
INTERNAL COATING	EPOXY POWDER COATING
EXTERNAL COATING	EPOXY POLYESTER POWDER COATING
HELIUM LEAK DETECTION TESTING	NO
WARRANTY IN YEARS	6
APPROX. GUN WEIGHT IN KG	N/A
WORKING PRESSURE	11BAR
DIA. OF SHELL (OD)	300.0 mm
OPERATING TEMPERATURE	+5°C to +60°C
HYDROSTATIC TEST PRESSURE	30BAR
CYLINDER MATERIAL SPEC.	STEEL CR2(DC01)
BODY THICKNESS	3.0 mm
EXTINGUISHER LABEL	SCREEN PRINTED

WATERMIST CARTRIDGE

Ceasefire's Watermist Cartridge is powered by revolutionary Watermist technology which harnesses the massive cooling power of water and multiplies it by 400. The Ceasefire Watermist Cartridge is the first-of-its-kind extinguisher to offer Watermist technology or Foammist technology in an ultra-safe cartridge extinguisher.

When the extinguisher is activated in case of a fire, the CO² from the cartridge combines with water in the container. This mixture is then broken down into a fine mist of 54 microns in the mist generator nozzle. When it comes into contact with a fire, this fine Watermist turns into steam that cools the area and kills the fire. Without causing any collateral damage to your machinery or the Earth.

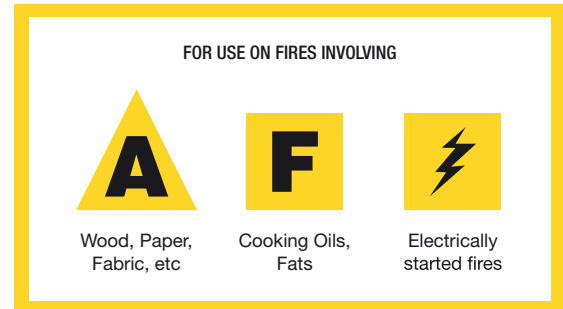

This Watermist can be combined with foam technology to create the ultimate Foammist extinguisher.

The Watermist Cartridge is ideal for Class A, F and electrically started fires, while the Foammist Cartridge is highly effective in fighting Class B fires.

Portable Extinguisher



3 Ltr


6 Ltr

TECHNICAL SPECIFICATIONS:

NOMENCLATURE	FIRE EXT WATER MIST 3L SS CT RED	FIRE EXT WATER MIST 6L SS CT RED
PRODUCT CODE	CF-001245	CF-001159
PRESSURE TYPE	CARTRIDGE TYPE	CARTRIDGE TYPE
EXTINGUISHING AGENT	WATER	WATER
APPLICABLE ON FIRES	A, F & ELECTRICAL STARTED FIRE	A, F & ELECTRICAL STARTED FIRE
IS 15683 RATINGS	2A	3A
	25F	75F
EN 3 RATINGS	NA	NA
	NA	NA
	NA	NA
CERTIFICATION STANDARD	PED, IS 15683	PED, IS 15683
CERTIFICATION BODY	BIS & EUROCERT	BIS & EUROCERT
GROSS WEIGHT	6.90 TO 7.20 KG	11.50 TO 12.10 KG
NET CONTENTS	3.00 TO 3.15 LTR	5.70 TO 6.00 LTR
APPROX. HEIGHT OF FIRE EXT.	445 MM	610 MM
DISCHARGE MECHANISM	SQUEEZ GRIP	SQUEEZ GRIP
CAN CONSTRUCTION	DRAWN ROLLED AND MIG WELDED	DRAWN ROLLED AND MIG WELDED
VALVE / CAP CONSTRUCTION	FORGING AND MACHINING	FORGING AND MACHINING
INTERNAL COATING	NO	NO
EXTERNAL COATING	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER
HELIUM LEAK DETECTION TESTING	NO	NO
WARRANTY IN YEARS	9	9
APPROX. GUN WEIGHT IN KG	N/A	N/A
WORKING PRESSURE	15	15
DIA. OF SHELL (OD)	140 MM	160 MM
OPERATING TEMPERATURE	5°C TO 55°C	5°C TO 55°C
HYDROSTATIC TEST PRESSURE	35BAR	35BAR
CYLINDER MATERIAL SPEC.	SS 304 (1.4301)	SS 304 (1.4301)
BODY THICKNESS	1.5MM	1.5MM
EXTINGUISHER LABEL	SCREEN PRINTED	SCREEN PRINTED
GLOW IN THE DARK FIRE EXTINGUISHER LOCATOR	YES	YES
GREEN PACKAGING (ENVIRONMENT FRIENDLY)	YES	YES
MOUNTING BRACKET	J HANGER	J HANGER

FOAMMIST-BASED CARTRIDGE

This cartridge extinguisher uses the powerful Foammist extinguishing agent to take on the biggest of fires. Foammist is a revolutionary technology wherein the power of foam is multiplied hundreds of times over. In Ceasefire's Foammist-based Cartridge, the foam in the container combines with nitrogen in the cartridge, and is released through the mist generator nozzle as Foammist. Under 80 microns in size, this mist envelopes over the fire, cutting off the oxygen supply and putting out the fire. This versatile firefighter works on Class A, B, F and electrically started fires.

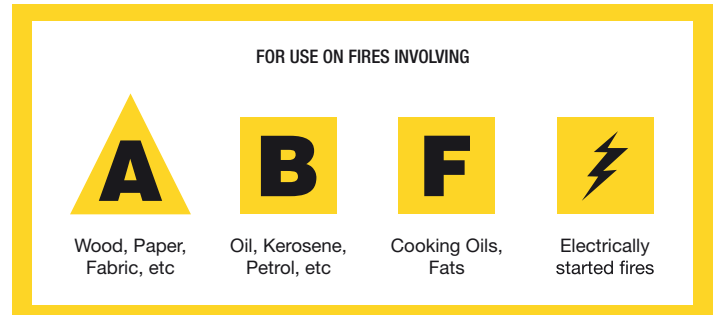

Portable extinguisher:



3 Ltr

6 Ltr

TECHNICAL SPECIFICATIONS:

NOMENCLATURE	FIRE EXT FOAM MIST 3L SS CT RED	FIRE EXT FOAM MIST 6L SS CT RED
PRODUCT CODE	CF-001246	CF-001160
PRESSURE TYPE	CARTRIDGE TYPE	CARTRIDGE TYPE
EXTINGUISHING AGENT	6% OF KV FOAM 3% C-6	6% OF KV FOAM 3% C-6
APPLICABLE ON FIRES	A, B, F & ELECTRICAL STARTED FIRE.	A, B, F & ELECTRICAL STARTED FIRE.
IS 15683 RATINGS	2A	3A
	55F	89F
	25F	75F
EN 3 RATINGS	NA	NA
	NA	NA
	NA	NA
CERTIFICATION STANDARD	PED, IS 15683	PED, IS 15683
CERTIFICATION BODY	BIS & EUROCERT	BIS & EUROCERT
GROSS WEIGHT	7.00 TO 7.20 KG	11.60 TO 12.20 KG
NET CONTENTS	3.00 TO 3.15 LTR	5.70 TO 6.00 LTR
APPROX. HEIGHT OF FIRE EXT.	445 MM	600 MM
DISCHARGE MECHANISM	SQUEEZ GRIP	SQUEEZ GRIP
CAN CONSTRUCTION	DRAWN ROLLED AND MIG WELDED	DRAWN ROLLED AND MIG WELDED
VALVE / CAP CONSTRUCTION	FORGING AND MACHINING	FORGING AND MACHINING
INTERNAL COATING	NO	NO
EXTERNAL COATING	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER
HELIUM LEAK DETECTION TESTING	NO	NO
WARRANTY IN YEARS	9	9
APPROX. GUN WEIGHT IN KG	N/A	N/A
WORKING PRESSURE	10BAR	10BAR
DIA. OF SHELL (OD)	140 MM	175.0 MM
OPERATING TEMPERATURE	+5°C TO +55°C	+5°C TO +55°C
HYDROSTATIC TEST PRESSURE	35BAR	35BAR
CYLINDER MATERIAL SPEC.	SS 304 (1.4301)	SS 304 (1.4301)
BODY THICKNESS	1.5 MM	1.5 MM
EXTINGUISHER LABEL	SCREEN PRINTED	SCREEN PRINTED
GLOW IN THE DARK FIRE EXTINGUISHER LOCATOR	YES	YES
GREEN PACKAGING (ENVIRONMENT FRIENDLY)	YES	YES
MOUNTING BRACKET	J HANGER	J HANGER



Fire-prone industries:

Industries like chemical units, manufacturing setups which involve welding, etc. often face an extremely high risk of fire. In such cases, extinguishers are used frequently. This means that you either need a large number of extinguishers or one that can be refilled easily. The Cartridge is an ideal candidate for such firefighting scenarios.






Shops and Showrooms:

Fires in retail establishments can mean a huge loss of not only property, but also reputation. Not to mention the loss involved in the time spent repairing the damage. With its single-step activation, the Ceasefire Cartridge is ready to take on any fire and stop it before it destroys the whole store.



Factories:

The use of large amounts of raw material and fuel make factories and industries prone to a number of accidents. In case of a fire, the Ceasefire Cartridge can be readily activated and used to bring it down. Within seconds.

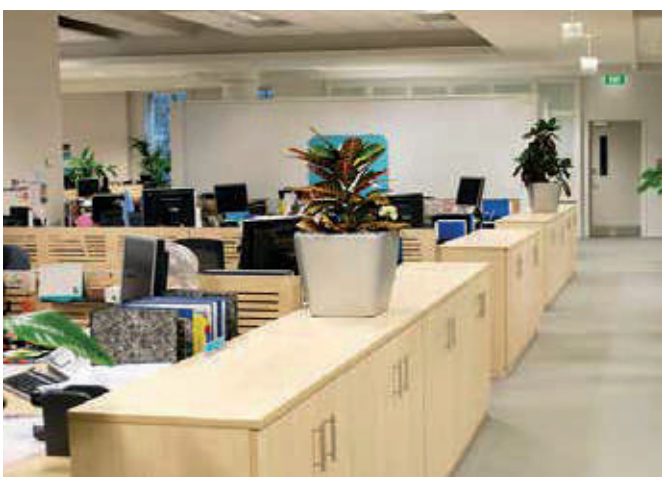

Offices and industries in remote areas:

The Ceasefire Cartridge is ideal for areas which are inaccessible, and cannot be reached in time by fire services. Since these extinguishers are spot pressurised, there is no fear of it losing pressure and failing in case of an emergency. The Cartridge can also be easily refilled without the downtime involved in sending the extinguisher to a factory and back.



Schools:

A fire in a school can mean hundreds of casualties. Which is why schools require extinguishers that are easy to operate by anyone, so that even a child can stop a fire. The Ceasefire Cartridge can be easily activated and deployed in a fire. Moreover, it can be stored safely without worrying about the extinguisher malfunctioning.



Petrol Pumps

Any site with large quantities of inflammable petrol and diesel is highly susceptible to a fire accident. The Ceasefire Cartridges is not only a dependable firefighter, but being spot pressurised, it's completely safe and will never cause an explosion.

OUR SIZE AND SCALE



Ceasefire is today a team of over 2000 professionals who collectively work from over 100 Ceasefire branches in the country to bring in 3000 new customers each month.

Ceasefire is today uniquely positioned to offer its customers a one-stop-shop, single window service offering, having evolved fully on the three aspects of-

One, a full range of fire safety products,

Two, end-to-end solutions for the customers, starting from Design to Manufacturing to Commissioning and Maintenance, and

Three, a dynamic distribution model that ensures Ceasefire products are available where the customer needs them making us an omnipresent brand in India.

Today the Ceasefire customers are a family of over 500,000 and include the best names from across industry

verticals. At the core of the Ceasefire's evolution is the company's commitment to its product quality.

Every Ceasefire product conforms to the highest global standards and carry a host of national & international certifications including BIS, EN3, EN1866, PED, ISO 9001 and OHSAS.

Behind our robust distribution are

100 Branches
Covering

300 towns with **1500+** trained professionals

This distribution helps us

Add **3000** new customers every month

Sell a product every **61 seconds**

Save a life every **5 minutes**



Ceasefire Industries Private Limited

B1/ H1, 2nd Floor, Mohan Cooperative
Industrial Estate, Mathura Rd, New Delhi - 110044

Tel: 011-4184 6800 | Call our Free Hotline : 1800 120 3473 / +91 9540 666 666

E-mail: response@ceasefire.in



Scan the QR code
to visit our website

Website : www.ceasefire.in

Follow us on:



Please check the product specifications at the time of placing your order. Specifications can change without notice due to our continuous R&D and product improvisation initiatives.

v3-07/09/2026